

# 18 ZONES WALKTHROUGH



**CODE: WD002**



## FEATURES.

- Both the module application and the settings adopts digital signal control.
- Sensitivity can be adjusted according to the sample.
- Use LED side diffusion alarm method, can distinguish the metal size.
- Strong and weak indicator light can automatically check the surrounding environment.
- 7-inch big LCD color screen with graphic operating interface to display traffic count, alarm count & settings interface.

## WORKING ENVIROMENT.

Enviroment temperature

-20°C ~ +45°C, no condensation

Storage temperature

-20°C ~ +60°C, no condensation

Setting up

The installation location should be far away from power line and communication cable.

No large metal objects or strong magnetic field within 2 meters of the walkthrough.

Equip with rain shelter or other rain protection to use outdoor.

## SPECIFICATION.

Power Supply

AC85~264V/50Hz

Power

≤10W low power consumption

Frequency

100 frequency bands, self-adaption when boot

Working enviroment

-20°C ~ +45°C

System detection

detect whether there is a fault in the system

Weight


70KG




## SPECIFICATION.

Channel size	1990mm * 700mm * 500mm (H*W*D)
Product dimensions	2230mm * 835mm * 580mm (H*W*D)
Main control box size	750mm * 255mm * 445mm (L*W*H)
Door plank size	2350mm * 650mm * 190mm (L*W*D)
Size	2350mm * 650mm * 190mm (L*W*H)

## SETTING INTERFACE.

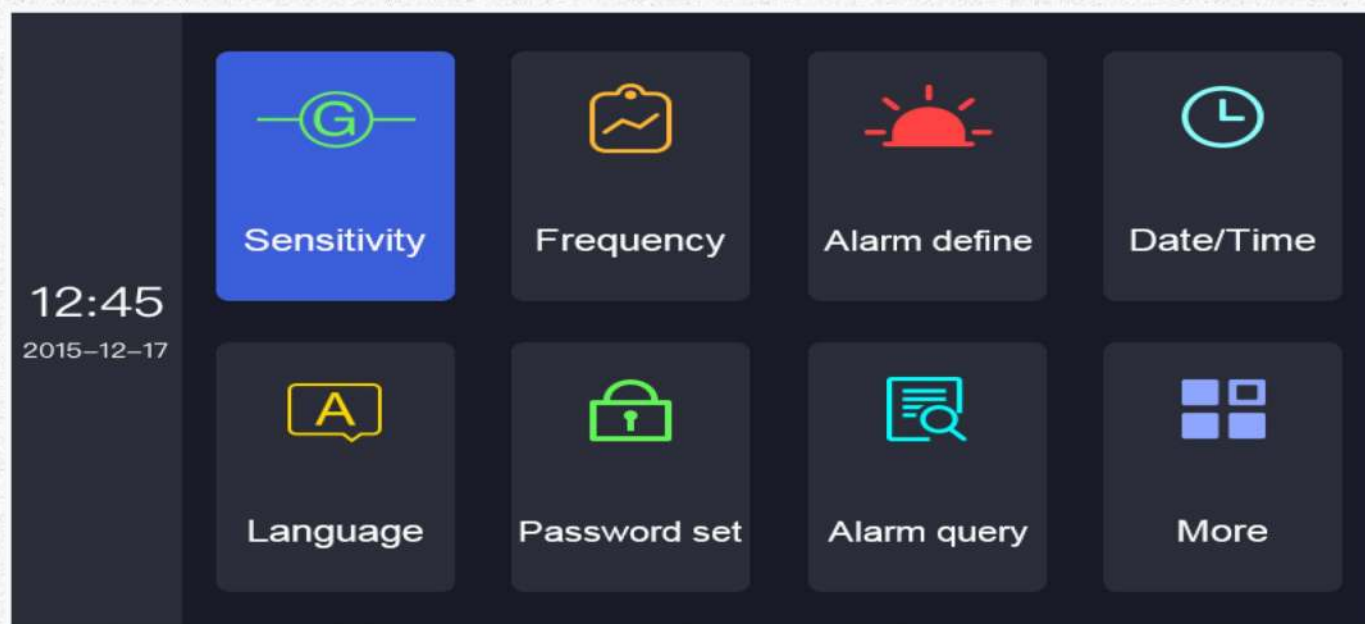

\_\_\_\_\_

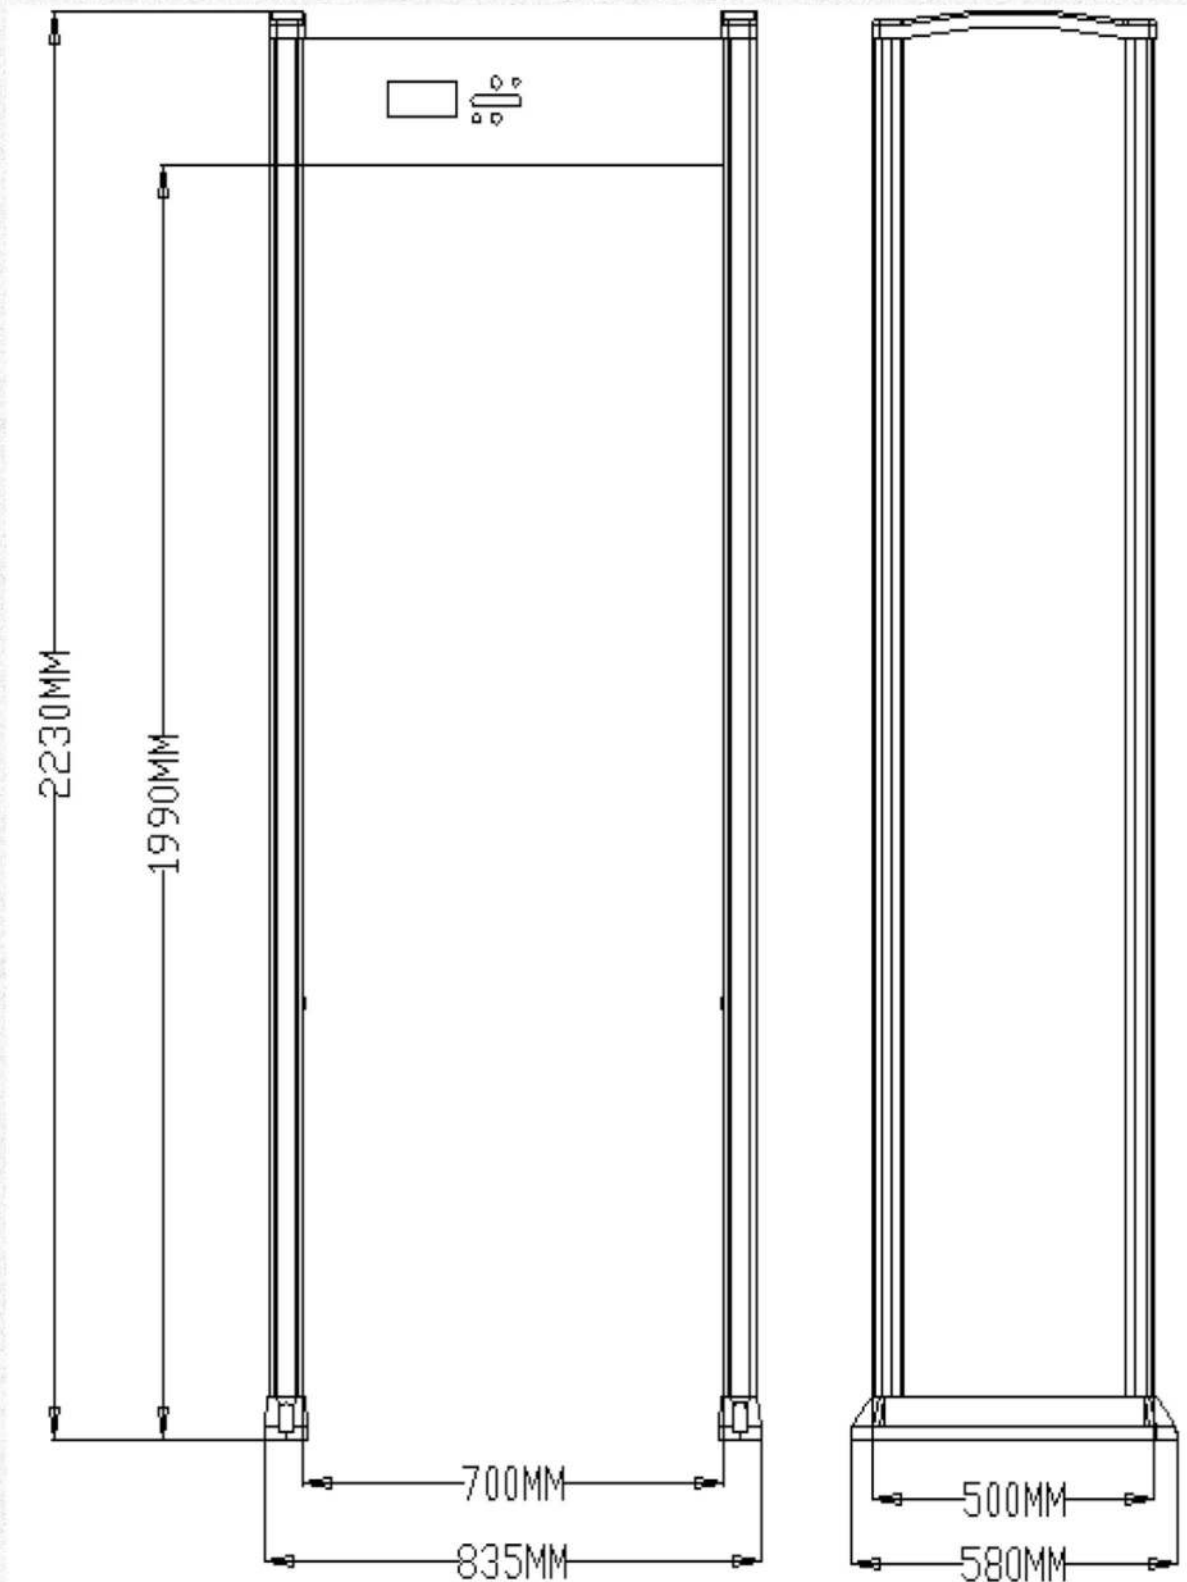




## ZONE SETTING.




6区



12区



18区

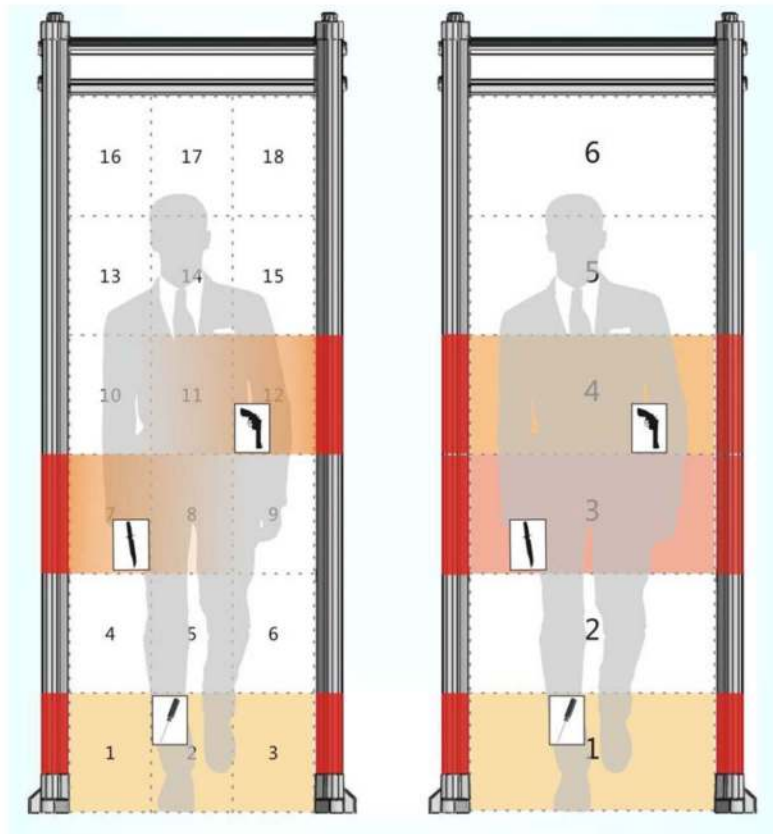

## Showroom

Address : 1306 (B), Tharaphy Road, 34 Wards, North  
Dagon Township, Yangon.

Hotline : +95 9 456 353 403.

Mobile : +95 9 268 763 922,+95 9 971990403.

Office : +95 1 358 31 34.

Email : [info@sub-waysservices.com](mailto:info@sub-waysservices.com)

Website : [www.sub-waysservices.com](http://www.sub-waysservices.com)

Follow us:

